

Outdoor Plexiglass Gazebo Sunroom Window House Extension ODM

Basic Information

Place of Origin: China
Brand Name: Eloyd
Certification: CE
Model Number: Sunroom
Minimum Order Quantity: 2

• Price: 98USD/

Packaging Details:
 EPE Foam wrapped

• Delivery Time: 30days

Payment Terms: L/C, T/T, Western Union, PayPal

• Supply Ability: 10000



Product Specification

Material: Aluminum Alloy+Glass+Accessories
 Glass: Double Tempered Double Glazed Lowe

• Function: Heat & Sound Insulation

Design: According To Confirmed Drawing

Application: Sunshine Room
 Roof Material: Insulating Glass
 Package: EPE Foam Wrapped

• Highlight: Outdoor glass gazebo sunroom,

ODM glass gazebo sunroom, Outdoor plexiglass sunroom



More Images









MOBILE SUNROOM SERIES

Warranty service, More than 5 years













Whole house customization

High efficiency sound insulation

Multiple seal


Guaranteed after sale

CE certification


Product Parameters

SERIES	panoramic sliding window
BRAND	Eloyd
PROFILE	6063# Grade A titanium magnesium aluminum alloy profiles
THICKNESS	2.0mm aluminium thickness
GLASS	Double Tempered Glass with argon ags
MIDDLE HOLLOW	5mm+20A+5mm
HARDWARE	Hidden hardware
Craftsmanship	Thermal break Aluminium

Against the wall

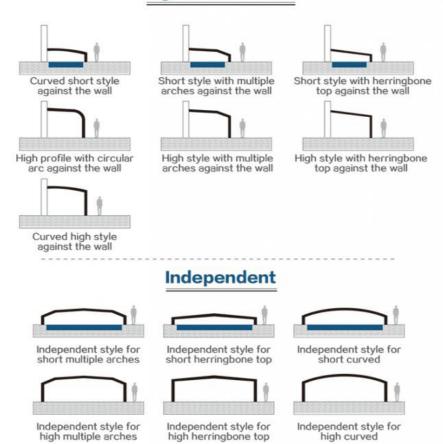

OPENING AND CLOSING METHOD

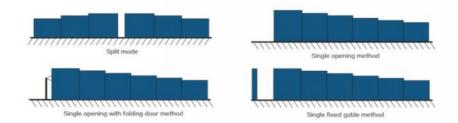

⊕ A VARIETY OF STYLES ARE AVAILABLE

A4 series

Partial parameters and configurations Material:Main stcucture T5 6063 high-strength

aluminum alloy Thickness:3.0mm

Applicable span: <4m

Electric system: 24V safety voltage drive system Optional: lighting system, electric system, and

sunshade system

Surshade system: default with one door and one window Panel: PC endurance board, laminated tempered glass, hollow glass Sealant strip: EPDM rubbe strip Brush:inner and outer nylon brush







Solar energy

Manual



⊕ A VARIETY OF STYLES ARE AVAILABLE

A4 series

Partial parameters and configurations Material:Main stcucture T5 6063 high-strength

aluminum alloy Thickness:3.0mm

Applicable span: <4m

Electric system: 24V safety voltage drive system Optional: lighting system, electric system, and

sunshade system

Surshade system: default with one door and one window Panel: PC endurance board, laminated tempered glass, hollow glass Sealant strip: EPDM rubbe strip Brush:inner and outer nylon brush







Solar energy

Manual



A10 series

Partial parameters and configurations Material: Main stcucture T5 6063 high-strength

aluminum alloy Thickness: 4.0mm

Applicable span:≤10m

Electric system: 24V safety voltage drive system Optional: lighting system, electric system, and

Optional: lighting system, electric system sunshade system: Door and window system: default with one door and one window Panel: PC endurance board, laminated tempered glass, hollow glass Sealant strip: EPDM rubbe strip Brush:inner and outer nylon brush









Solar energy

Electric

Manual

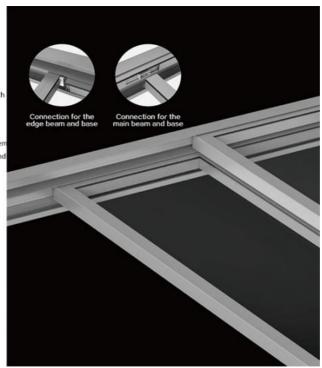



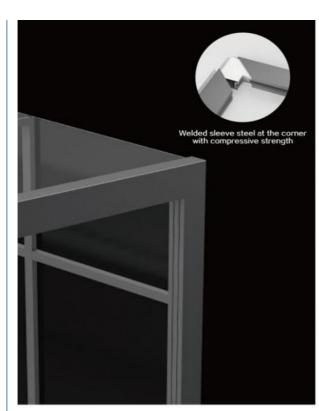

A15 series

Partial parameters and configurations Material:Main stcucture T5 6063 high-strength

aluminum alloy

Thickness: 4.0mm

Applicable span:≤10m

Electric system: 24V safety voltage drive system

Optional: lighting system, electric system, and

Optional: lighting system, electric syster sunshade system: default with one door and one window Panel: PC endurance board, laminated tempered glass, hollow glass Sealant strip: EPDM rubbe strip Brush:inner and outer nylon brush







Solar energy

Electric

Manual



Application Scenario












Application Scenario















Multiple Choices



FLOAT GLASS



INSULATED DIUELE GLASS




ULATED TRIPLE GLASS




REFLECTIVE GLASS



LOW-E GLASS



TEMPERED GLASS



LAMINATED GLASS



MIZED ART GLASS

Aluminum profile color





Fluorocarbon Fluorocarbon Sand gray grey black crystal color





Black brown





Starbucks coffee Fluorocarbon Technical wood black





Certificate



AS2047



CSA



CE



CE



ALIBABA CERTIFICATION



intertek



PATENT CERTIFICATE



PATENT CERTIFICATE



FOSHAN YILUODE DOORS AND WINDOWS CO., LTD.

Eloyd Doors and Windows, founded in 2016, boasts years of experience in the manufacturing of doors and windows. We are a large-scale, high-end German-style doors and windows enterprise that specializes in independent research, production, and sales. Our flagship products include aluminum alloy system doors and windows, such as heavy-duty sliding doors, luxury folding doors, thermal break casement windows, soundproof sliding windows, European-style sunrooms, pavilions, and pergolas.



Packing and shipping











TRANSPORTATION









Customer photo -

































FAQ

0.0

Q1. What about your packages?

A1. Inner EPE paper packing, exterior with wooden frame crate box. We have been exporting lots of products overseas, no any clients make any complains on our packages.

Q2. Is there any price difference between powder coating and anodising?

A2. No price difference between them. We recommend you to choose anodised finish if the house is near salt water for long-effective corrosion resistance, but powder coating will be better if the house is far away from salt water.

Q3. What is the delivery time?

A3. Normally 30-35days after received the deposit and confirmed all the details.

Q4. What is Trade Assurance?

A4. Trade Assurance is a free service by Alibaba.com built to create trust in trade.We provide you with a set of features and protections to help ensuring suppliers' honor and important details of your contract. We got alibaba "Trade Assurance" and safeguard the interests of the buyers.

Foshan Yiluode Doors And Windows Co., Ltd.

+8618169835994

sales08@fseloyd.com



@ aluminiumwindowsdoor.com

6-2 North Songgang Industrial Road, Shishan Town Foshan Guangdong China